Traffic Control Products



F41FSB1

347





Ribbed

E421712-Yellow

A. Eagle Bumper Post Sleeves

- · High-density polyethylene with UV inhibitors
- Provides extra impact protection
- · Maintenance-free alternative to painting
- · Can be trimmed for an exact fit
- · Ribbed Sleeve Colors: White, red, brown, black, orange, green, handicap blue, lime and yellow
- · Smooth Sieeve Colors: Red, yellow, blue and white

Part Number	Description	Height	Color
E421732	Ribbed Post Sleeve for 4" Post	56"	Specify
E421730	Ribbed Post Sleeve for 6" Post	56"	Specify
E421738	Ribbed Post Sleeve for 8" Post	57"	Specify
E421735	Smooth Post Sleeve for 4" Post	56"	Specify
E421736	Smooth Post Sleeve for 6" Post	56"	Specify
E421737	Smooth Post Sleeve for 8" Post	57"	Specify

B. Eagle Column Protectors

- · Fits 6", 8", 10" and 12" round or square supports
- Yellow with black straps. Orange or lime green with roflactive strans

with reflective strups			
Part Number	Description	Color	
E421706	Protector for 6" Column	Specify	
E421708	Protector for 8" Column	Specify	
E421710	Protector for 10" Column	Specify	
E421712	Protector for 12" Column	Specify	

6	-	-	
5	-		-
			-
-	1000	Statement of the local division in which the local division in the	
- 22	3.4	-	
- 12			



Full Dome Mirror 360°

Half Dome Mirror 180°

Convex Mirror

D. Se-Kure View® Dome Mirrors

- · Dome mirrors keep entire room in view from one spot for safety and security
- · Full Dome Mounting: Suspend from chain set hardware included
- · Half Dome Mounting: Easy ceiling or wall mounting screws and anchors included

Part Number Description

SA60NV-360-18	18" Full Dome Mirror
SA60NV-360-26	26" Full Dome Mirror
SA60NV-360-32	32" Full Dome Mirror
SA60NV-360-36	36" Full Dome Mirror
SA60NV-360-48	48" Full Dome Mirror
SA60NV-180-18	18" Half Dome Mirror
SA60NV-180-26	26" Half Dome Mirror
SA60NV-180-32	32" Half Dome Mirror
SA60NV-180-36	36" Half Dome Mirror



S

S

5

5 S

5

- . Lens is made of premium quality acrylic - unbreakable, long lasting and lightweight
- Provides a 20% brighter mirror than glass with less distortion

Part Number	Description
SA6CVI-12	12" Indoor Convex Mirror
SA6CVI-18	18" Indoor Convex Mirror
SA6CVI-26	26" Indoor Convex Mirror
SA6CVI-30	30" Indoor Convex Mirror
SA6CVI-36	36" Indoor Convex Mirror
SA6CVO-12	12" Outdoor Convex Mirror
SA6CVO-18	18" Outdoor Convex Mirror
SA6CVO-26	26" Outdoor Convex Mirror
SA6CVO-30	30" Outdoor Convex Mirror
SA6CVO-36	36" Outdoor Convex Mirror



C. Falcon Sonic Blast Safety Horns

 Uses HF01234ze, a specially formulated, non-flammable propellant that has an ultra-low Global Warming Potential (GWP)

F41FSB1

Great option for uses where flammability is a concern

1 oz size:

· Provides up to 12 blasts per can

· Provides a 112dB blast at 10 feet

- 5 oz size:
- · Durable high-impact plastic trumpet
- · Provides up to 56 blasts per can
- Provides a 120dB blast at 10 feet

Part Number Description Safety Horn, 1 oz with Clip F41FSB5BU Safety Horn, 5 oz

F41FSB5BU

C

Traffic Control Products



Yellow/Black

White/Orange

В

RAD64055723

CAU

,000'

,000' ,000' ,000'

RAD64055720

3M™ Reflective Telescoping Cone Bar JB2RCB6YB 3½' to 6' Bar JB2RCB100W 6' to 10' Bar

RADNOR

B Radnor® 2 Mil Barricade Tape

- Designed to protect and identify above ground hazardous areas or elements such as construction sites, work areas, crime scenes, crowd control and any potentially dangerous areas
 Printed in crisp, bold black lettering
- on yellow or red polyethylene material

Part Number	Description	Color	Size
 RAD64055720 RAD64055721 	CAUTION Tape	Yellow	3" x 1
	CAUTION DO NOT ENTER	Tape Yellow	3" x 1
 RAD64055722 RAD64055723 	DANGER Tape	Red	3" x 1
	DANGER DO NOT ENTER	Tape Red	3" x 1
 RAD64055724 RAD64055725 	CAUTION CUIDADO Tape	Yellow	3" x 1
	DANGER PELIGRO Tape	Red	3" x 1
DANGER		AD64055722 AD64055721	





C. Dicke Superbright[™] Reflective Roll-Up Signs

- Corner pockets made of tough polycarbonate plastic for durability
- Back-to-back hook and loop strap for storage
- Meets the requirements of the MUTCD Standard
- Signs are NCHRP-350 compliant when used with one of the NCHRP-350 compliant stands

Part Number	Description	Color
DTCRUR36200RWA	36" Road Work Ahead	Reflective Orange
DTCRUR362000LRA	36" One Lane Road Ahead	Reflective Orange
DTCRUR36200FS	36" Flagger Symbol	Reflective Orange

D. Dicke TwinFlex[™] Series Stand

- Full-size sign stands for rigid and roll-up signs feature steel and aluminum construction for long-lasting, dependable service
- · Dual construction provides stability in gusty wind conditions

Part Number	Description
DTCSTF18RUB	TwinFlex™ Sign Stand
DTCRGB4000	Rigid Sign Brackets for TwinFlex™ Sign Stand

E. Dicke UniFlex™ Compact Stand

- · Heavy-duty steel construction provides superior stability
- MUTCD and NCHRP-350 compliant

Part Number	Description
DTCSUF2000W	UniFlex" Compact Stand for 36" and 48" roll-up signs

F. Dicke DynaLite[™] Series Stand

- Non-spring, lightweight stand made of aircraft quality aluminum and/or powder coated steel
- MUTCD and NCHRP-350 compliant



WARNING O: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

WARNING @: This product can expose you to chemicals including DI(2-ethylhexyl)phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

348



A. EZ GRAB[™] Portable Delineators

Made of impact-resistant polyethylene
 Two 3" high intensity reflective bands

Part Number	Description	
CTM03-734 CTM03-730	42" Delineator Deluxe Post Delineator Base, 10 lb	

B. GRIP N GO[™] Channelizer Cones

- 42" low density polyethylene is durable and impact-resistant
- · Reinforced EZ Grab handle, stackable for storage and transport
- NCHRP-350 certified and meet MUTCD specifications

Part Number Description CTM03-750-6HI 42" Cone with (4) 6" High Intensity Stripes CTM03-750-6EG 42" Cone with (4) 6" Engineer Grade Reflect

CTM03-750-6EG 42" Cone with (4) 6" Engineer Grade Reflective Stripes CTM03-752-16 Channelizer Base, 16 lb

C. Stop/Slow Paddles

Meets MUTCD standards

Part Number	Description
CTM03-851	18" Silk-Screened with 9" Poly-grip Handle
CTM03-823P	24" High Intensity Sheeting with 81" Plastic Handle

D. Triangle Reflective Warning Kits

- Meets or exceeds all DOT FMVSS125 requirements
- · Weighted base ensures triangles won't move by wind gusts

Part Number Description

CTM95-03-009 Set of 3 in a Red Box

E. Rubber Wheel Chocks

- · Maximum durability and skid protection
- Weighs 9 lbs

Part Number Description

CTM2048WC	Wheel Chock, No Chain
CTIM2048WCC	Wheel Chock with 12" Chain

F. TRAILBLAZER[™] Vertical Panels

- Offers high visibility portable delineation
- NCHRP-350 certified and meets MUTCD specifications
- Stackable for ease of transport and storage

Part Number Description

	_
EG Sheeting Both Sides	
Rubber Base, 20 lb	
	EG Sheeting Both Sides

G. Warning Flags

· Reinforced heavy-duty fluorescent red-orange vinyl flags

Part Number	Description	
O CTM03-229-3417	18" Vinyl Flag with 24" Hardwood Dowel	
O CTM03-229-3418	24" Vinyl Flag with 36" Hardwood Dowel	



WARNING ①: This product can expose you to chemicals including Vinyl chloride, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Traffic Control Products

Justrite Safety Group

A. 3/4" Thick Cushion-Ease® Series

- · Made from a resilient, heavy-duty rubber compound
- Modular male/female interlocking design is compatible with optional NoTrax® 551 M.D. Ramps®
- · Multi-nib support design for exceptional fatigue relief and aeration
- . (550) Large hole drainage system, ideal for wet environments
- . (556) Solid-top design with an anti-slip texture provides a stable work surface
- . (557) Solid bubble-top with anti-slip surface provides ergonomic comfort

Part Number	Description	Size	Тор	Color
 \$57550\$0033BL \$57550\$0035BL 	550 Series Mat 550 Series Mat	3' x 3' 3' x 5'		Black Black
 S57556S0033BL S57557S0033BL 	556 Series Mat 557 Series Mat	3' x 3' 3' x 3'	Solid Egro™	Black Black

B. 3/4" Thick Niru® Cushion-Ease® Series

- 100% nitrile rubber compound modular mat provides ergonomic support and traction
- · (850 & 856) GSII technology has a Silicon Carbide grit surface for extreme traction in the harshest of work environments
- (650 & 850) Large holes provide excellent drainage and aeration for wet environments
- (656 & 856) Solid top design with an anti-slip texture
- · Compatible with any of the Cushion-Ease® family of mats and M.D. Ramp System®
- Fire retardant versions: (650SFR, 850SFR, 656SFR and 856SFR)

Part Number	Description	Size	Тор	Color
 S57650S0033BL S57650S0035BL 	650 Series Mat 650 Series Mat	3' x 3' 3' x 5'		Black Black
 S57850S0033BL S57850S0035BL 	850 Series Mat	3' x 3'	GSII	Black
	850 Series Mat	3' x 5'	GSII	Black
 S57656S0033BL S57856S0033BL 	656 Series Mat	3' x 3'	Solid	Black
	856 Series Mat	3' x 3'	Solid GSII	Black

C. 3/4" Thick 551 M.D. Ramp System®

- 2" beveled edge, 100% nitrile rubber, fits male/female locking system on Cushion-Ease® floor mats to reduce trip hazards
- · Mitered corners and a protruding tab locks together two adjoining ramps for a secure professional corner
- Square edges can be achieved by trimming off the miter
- Also available in 5' long male and female ramps

Part Number	Description	Size	Ramp	Color
 \$57551M0003YL \$57551F0003YL 	551 Ramp System	3'	Male	Yellow
	551 Ramp System	3'	Female	Yellow
 \$57551M0003BL \$57551F0003BL 	551 Ramp System	3'	Male	Black
	551 Ramp System	3'	Female	Black

D. 1/2" Thick 562 Sanitop®

- Durable rubber compound withstands harsh chemicals while creating a slip resistant surface
- · Drainage system channels liquid and debris away
- Molded beveled ramps on all 4 sides to minimize trip hazards
- Simple, economical solution for wet environments in many industrial or food service applications

Part Number	Description	Size	Color
O S57562S0035BL	562 Series Mat	3' x 5'	Black
O S57562S0310BL	562 Series Mat	3' x 10'	Black
O S57562S0320BL	562 Series Mat	3' x 20'	Black


E. Guard Dog Cable Protectors

- · Reinforced hinged lid for easy cable placement
- · Protects cables and hoses up to .75" outside diameter
- Standard ramps with 5-bar tread surface for maximum traction
- Modular interlocking design for easy setup

CB0GD5X75STO/B

Part Number	Description	Size	Color
CB0GD1X75STO/B	1 Channel	3' x 1.25"	Black/Orange
CB0GD2X75STO/B		3' x 1.25"	Black/Orange
CB0GD3X75STO/B	3 Channel	3' x 1.25"	Black/Orange
CB0GD5X75STO/B	5 Channel	3' x 1.25"	Black/Orange


B



Niru[®] Cushion-Ease[®] Series





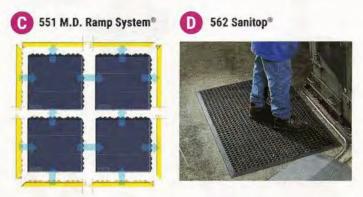

WARNING 0: This product can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

WARNING @: This product can expose you to chemicals including 2-Mercaptobenzothiazole, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

WARNING 1: This product can expose you to chemicals including Carbon Black Extracts, which is known to the State of California to cause cancer, and Butyl benzyl phthalate (BBP)d, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

ective Hand cwear Proteotion

Matting



Justrite Safety Group

A. Vinyl Diamond-Plate Safety/ Anti-Fatigue Mats (Dry)

- Durable vinyl diamond-plate design provides non-directional traction, and is easy to clean
- Sloped edges on all four sides to reduce trip hazards and allows easy access onto mat
- RedStop[™] non-slip backing to eliminate mat slippage

479 Cushion Trax® - %16" Thick

Part Number	Description	Thickness	Color
O S57479S0023BL	2' x 3' Mat	9/16"	Black
O S57479S0035BL	3' x 5' Mat	9/16"	Black
O S57479S0312BL	3' x 12' Mat	9/16"	Black
O S57479R2475BL	2' x 75' Roll	9/16"	Black
O S57479R3675BL	3' x 75' Roll	9/16"	Black
• S57479R4875BL	4' x 75' Roll	9/16"	Black
O S57479S0023YB	2' x 3' Mat	9/16"	Black/Yellow
O S57479S0035YB	3' x 5' Mat	9/16"	Black/Yellow
S57479S0312YB	3' x 12' Mat	9/16"	Black/Yellow
• S57479R2475YB	2' x 75' Roll	9/16"	Black/Yellow
O S57479R3675YB	3' x 75' Roll	9/16"	Black/Yellow
O S57479R4875YB	4' x 75' Roll	9/16"	Black/Yellow


975 Cushion Trax® Ultra® - 3/4" Thick for Added Comfort

Part Number	Description	Thickness	Color
O S57975S0023BL	2' x 3' Mat	3/4"	Black
O S57975S0035BL	3' x 5' Mat	3/4"	Black
0 S57975S0312BL	3' x 12' Mat	3/4"	Black
• S57975R2475BL	2' x 75' Roll	3/4"	Black
O S57975R3675BL	3' x 75' Roll	3/4"	Black
• S57975R4875BL	4' x 75' Roll	3/4"	Black
O S57975S0023YB	2' x 3' Mat	3/4"	Black/Yellow
S57975S0035YB	3' x 5' Mat	3/4"	Black/Yellow
0 S57975S0312YB	3' x 12' Mat	3/4"	Black/Yellow
O S57975R2475YB	2' x 75' Roll	3/4"	Black/Yellow
O \$57975R3675YB	3' x 75' Roll	3/4"	Black/Yellow
O S57975R4875YB	4' x 75' Roll	3/4"	Black/Yellow


979 Saddle Trax[®] – 1" Thick for Premium Comfort

x 3' Mat x 5' Mat x 12' Mat x 75' Roll	1" 1" 1"	Black Black Black
x 12' Mat	1" 1"	
	1"	Black
75' Poll		
A / J RUII	1"	Black
x 75' Roll	1"	Black
x 75' Roll	1"	Black
x 3' Mat	1"	Black/Yellow
x 5' Mat	1"	Black/Yellow
x 12' Mat	1"	Black/Yellow
x 75' Roll	1"	Black/Yellow
x 75' Roll	1"	Black/Yellow
x 75' Roll	1"	Black/Yellow
	x 75' Roll x 75' Roll x 3' Mat x 5' Mat x 12' Mat x 75' Roll x 75' Roll	x 75' Roll 1" x 75' Roll 1" x 3' Mat 1" x 5' Mat 1" x 12' Mat 1" x 75' Roll 1" x 75' Roll 1"

WARNING O: This product can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.







B. Nitrile Rubber Top Diamond Plate Safety/ Anti-Fatigue Mats

- Nitrile blend rubber top surface works in welding environments
- 600° hot nut test no ignition, barely any smoke
- · Sloped beveled edges to reduce trip hazards
- RedStop[™] non-slip backing to eliminate mat slippage
- Noticeably softer rubber top surface with a dense sponge backing material

490 Dura Trax[®] and 990 Dura Trax[®] Grande™

Part Number	Description	Thickness	Color
S57490S0023YB	2' x 3'	9/16"	Black/Yellow
S57490S0035YB	3' x 5'	9/16"	Black/Yellow
S57490R3675YB	3' x 75'	9/16"	Black/Yellow
S57990S0023YB	2' x 3'	1"	Black/Yellow
S57990S0035YB	3' x 5'	1"	Black/Yellow
S57990R3675YB	3' x 75'	1"	Black/Yellow





351

Matting

Justrite Safety Group

Fall Protection Confined Space A 419 Dyna-Shield® with Diamond Sof-Tred™



A. Sponge Safety/Anti-Fatigue Mats

- NoTrax® exclusive Dyna-Shield® top surface manufactured directly into them at for long lasting protection
- Non-directional diamond-plate top surface for added traction
- · All four sides are beveled to minimize trip hazards

Diamond Sof-Tred™ with Dyna-Shield® 419

Part Number	Description	Thickness	Color
S57419S0023BL	2' x 3' Mat	1/2"	Black
S57419S0026BL	2' x 6' Mat	1/2"	Black
S57419S0034BL	3' x 4' Mat	1/2"	Black
S57419S0035BL	3' x 5' Mat	1/2"	Black
S57419S0036BL	3' x 6' Mat	1/2"	Black
S57419S0312BL	3' x 12' Mat	1/2"	Black
S57419R0024BL	2' x 60' Roll	1/2"	Black
S57419R0036BL	3' x 60' Roll	1/2"	Black
S57419R0048BL	4' x 60' Roll	1/2"	Black
S57419S0023BY	2' x 3' Mat	1/2"	Black/Yellow
S57419S0026BY	2' x 6' Mat	1/2"	Black/Yellow
S57419S0034BY	3' x 4' Mat	1/2"	Black/Yellow
S57419S0035BY	3' x 5' Mat	1/2"	Black/Yellow
S57419S0036BY	3' x 6' Mat	1/2"	Black/Yellow
S57419S0312BY	3' x 12' Mat	1/2"	Black/Yellow
S57419R0024BY	2' x 60' Roll	1/2"	Black/Yellow
S57419R0036BY	3' x 60' Roll	1/2"	Black/Yellow
S57419R0048BY	4' x 60' Roll	1/2"	Black/Yellow

B. T17 Superfoam™

- · Comfortable foam material provides comfort
- Unique PVC/nitrile rubber foam blend resists chemicals, cutting fluids, greases, oils and fats
- Pattern on the top and bottom creates an anti-slip surface and minimizes mat movement
- Beveled edges on all 4 sides reduces trip hazards
- Non-allergenic, silicone-free compound

Part Number	Description	Thickness	Color
0 S57T17S0032BL	3' x 2' Mat	5/8"	Black
S57T17S0033BL	3' x 3' Mat	5/8"	Black
S57T17S0034BL	3' x 4' Mat	5/8"	Black
S57T17S0035BL	3' x 5' Mat	5/8"	Black
0 S57T17S0036BL	3' x 6' Mat	5/8"	Black
O S57T17S0038BL	3' x 8' Mat	5/8"	Black
0 S57T17R3675BL	3' x 75' Roll	5/8"	Black
S57T17R4875BL	4' x 75' Roll	°/a"	Black

B T17 Superfoam[®]





C. Corrugated and Diamond Plate Switchboard Matting

- Insulated PVC matting engineered to protect workers from electric shock
- 830 Series: Corrugated saw-tooth top surface Added traction and easy to sweep clean
- 831Series: Diamond-plate surface Added traction
- Each square foot of this matting is tested in conformance with ANSI/ASTM D-178 specifications
- Recommended maximum use voltage: 17,000

Part Number	Description	Thickness	Color
830 Series			
O S57830R0275BL	2' x 75' Roll	1/4"	Black
S57830R0375BL	3' x 75' Roll	1/4"	Black
S57830R0475BL	4' x 75' Roll	1/4"	Black
S57830R0375BY	3' x 75' Roll	1/4"	Black/Yellow
831 Series			
O S57831R0275BL	2' x 75' Roll	3/4"	Black
O S57831R0375BL	3' x 75' Roll	1/4"	Black
O S57831R0475BL	4' x 75' Roll	7/4"	Black
S57831R0375BY	3' x 75' Roll	1/4"	Black/Yellow

WARNING **①**: This product can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

First Aid Producte



A. Vision Ultra HD LED Headlight

· Six light modes with pivoting head to direct beam of light

• Delivers up to 400 lumens - the brightest Energizer offers

Part Number	Description	
E33HDE32E	6-Mode Ultra HD LED Headlight	

B. Industrial Vision HD LED Headlight

Three light modes (white spot/white flood/spot and flood together)
 Advanced dimming controls light intensity in Spot + Flood Mode

Part Number Description		Color
E33HDBIN32EB	3-Mode HD LED Headlight	Red

C. Vision LED Headlight

 Two run modes to control brightness and runtime, pivots to direct light where you need it

· Powerful beam. Up to 4X brighter than standard LED technology

Part Number	Description	Color
E33HDA32E	2-Mode LED Headlight	Blue

D. EVEREADY® Industrial 2D LED Flashlight

35 lumens, 113 hour run time and 45 meter beam distance

- · Chemical-resistant construction resists staining and corrosion
- Part Number Description Color

E33EVINL25S	LED Mid-Range Industrial Flashlight	Yellow

E. Energizer® Hard Case® PROFESSIONAL PivotPlus LED Task Light

Pivoting head rotates up to 175 degrees

B

300 lumens, 5 hour run time and 30 meter beam distance

Part Number	Description	
E33HCSW21E	Pivoting LED Task Light	



LED Task Light

- Three white LEDs deliver 300 lumens of light
- Rugged ABS, steel and rubber construction
- · Shatterproof lens and LEDs never need replacing

Part Number	Description	Color
E33TUF2AAPE	Industrial Task Light	Black

Lighting Products and Batteries

G. MAX Alkaline Batteries

· Holds power for up to 10 years in storage

Part Number	Description	Packaged
E33E91BP-4	AA Max Alkaline	4/pk
E33E92BP-4	AAA Max Alkaline	4/pk
E33E93BP-2	C Max Alkaline	2/pk
E33E95BP-2	D Max Alkaline	2/pk
E33522BP	9 Volt Max	Each

H. Ultimate Lithium Batteries

- · Lasts up to 9x longer in high-tech devices
- Operates in extreme temperatures from -40°F to 140°F

Part Number	Description	Packaged	Hire Vire
E33L91BP-2	AA Lithium	2/pk	Energ
E33L91SBP-4	AA Lithium	4/pk	Finer,
E33L91SBP-8	AA Lithium	8/pk	
E33L92BP-2	AAA Lithium	2/pk	E33L91BP-2

I. Industrial Batteries

- AA and AAA batteries have in-device leakage protection for up to 2 years after fully used
- No Mercury added no special disposal needed

Part Number	Description	Packaged
E33EN91	AA Industrial Alkaline	4/pk
E33EN92	AAA Industrial Alkaline	4/pk
E33EN93	C Industrial Alkaline	12/pk
E33EN95	D Industrial Alkaline	12/pk
E33EN22	9 Volt Industrial Alkaline	12/pk
E33EN529	6 Volt Industrial Alkaline	Each



Facility Supplies

Lighting Products



TREMULIGHT

A. POLYSTINGER® LED HAZ-LO® Flashlight

- Class I, Div 1 rating
- · Super-tough, non-conductive chemical and corrosion-resistant for hazardous environments
- 10.2" (25.9 cm); 13.5 oz (382 grams) with battery
- High mode 15,000 candela, 130 lumens, 4 hour run time
- Low mode 5,700 candela, 50 lumens, 12 hour run time
- Moonlight Mode 120 candela, 1.3 lumens, 20 day run time
- · USTC Div 1 hazardous location listed: Class I, II, Div 1, Groups C, D, F & G; Class I, Div 2, Groups A, B, C & D; Class III, 138°C (T3C)

Part Number Description

SD876412

LED Flashlight with 120V AC/12V DC Smart Chargers

B. 4AA ProPolymer® LED Flashlight

- Impact and shock resistant LED flashlight
- Seven ultra-bright 100,000-hour life LEDs
- 67 lumens typical, runs up to 155 hours
- · Features a wrist lanyard connection
- UL Listed for Class I, Div 1, Groups C, D; Class I, Div 2,
- Groups A, B, C, D; Class II, Div 2, Groups F, G; Class III, T3C Class I, Div 2, Groups A, B, C, D; Class II, Div 2, Groups F, G;
- Class III, T3C MSHA rated Appr. No. 10C-658-0

Part Number	Description	Length	Weight
SD868202	LED Flashlight	6.5"	6.3 oz

C. 3C ProPolymer® LED Flashlight

Impact and shock resistant LED flashlight

- Ten ultra-bright 100,000-hour life LEDs
- 85 lumens typical, runs up to 336 hours
- UL Listed for Class I, Div 1, Group D; Class I, Div 2,
- Groups A, B, C, D; Class II, Div 2, Groups F, G; Class III, T3C · Class I, Div 2, Groups A, B, C, D; Class II, Div 2, Groups F, G;
- Class III, T3C MSHA rated Appr. No. 10C-658-0

Part Number	Description	Length	Weight
SD833202	3C LED Flashlight	8.55"	13.5 oz





SD861200

SD861052

D. 3AA ProPolymer® HAZ-LO® and 4AA **ProPolymer® Lux Div 1 and 2 Flashlights**

- A high performance, C4[®] LED flashlight featuring momentary or constant on operation
- UL Listed Class 1, Div 1 (SD868720) Class 1, Div 2 (SD868244)
- UL Listed Class 1, Div 1 and MSHA rated (SD868602)

Part Number	Description	Run-Time	Candela/Lumens
SD868244	4AA Lux Div 2	6 hours	4,200/100
SD868602	4AA Lux Div 1	6 hours	4,200/100
SD868720	3AA HAZ-LO® Div 1	6.5 hours	14,000/120

E. 3C ProPolymer[®] Lux Div 1 and 2 Flashlights

- High-performance, super high flux LED
- UL Listed Class 1, Div 1 (SD833820)
- UL Listed Class 1, Div 1 and MSHA rated (SD833602)

Part Number	Description	Run-Time	Candela/Lumens
SD833602	3C Lux Div 1	4 hours	3,500/44
SD833820	3C HAZ-LO® Div 1	18 hours	7,000/150

F. 3N ProPolymer® LED Flashlight

- Three LEDs
- · Momentary blink or constant-on tail switch
- UL Classified for Class I, II, Div 1

Part Number	Description	Run-Time	Candela/Lumens
SD862202	3N ProPolymer® LED	10 hours	30

G. 3AA HAZ-LO® Headlamp

- · Compact, high-performance, C4® LED headlamp
- Class 1, Div 1 hazardous locations and MSHA rated

Part Number	Description	Run-Time	Lumens	
SD861200	3AA Headlamp	11 hours	120	

H. 3AAA Septor® Headlamp

- Ultra-bright and lets you choose 1, 3 or 7 100,000-hour life LEDs
- Three lighting modes: seven LEDs 900 candela, 120 lumens, four hour run time; three LEDs - 375 candela, 45 lumens, 10 hour run time; one LED - 100 candela, 13 lumens, 55 hour run time
- Includes adjustable elastic head strap and rubber hard hat strap
- 90° tilting head
- UL Listed for Class I, Div 2, Grps. A, B, C, D; Class II Div 2 Grps. F, G Class III

Part Number	Description	Weight
SD861052	3 AAA Headlamp	5.5 oz

Fall Protection Instrumentation Confined Space

Protective Workwear

Facility Supplies



A. ProTac[®] Series Flashlights

- Ultra-compact machined aluminum
- Features TEN-TAP[®] Programming choose from 3 programs
- · Includes nylon holster and batteries

ProTac® 1L-1AA

- · High (CR123/Alkaline): 350/150 Lumens; 6,300/2750 candela; runs 1.5/1.3 hrs
- . Low (CR123/Alkaline): 40/40 Lumens; 720/720 candela; runs 40/7.5 hrs
- Dual Fuel technology runs on (1) AA Alkaline or (1) CR123 Lithium both included

ProTac[®] 2AA Flashlight

- High: 250 lumens; 4,250 candela; runs 2 hours
- . Low: 18 lumens, 400 candela; runs for 43 hours
- Includes two "AA" alkaline batteries

ProTac[®] 2AAA Flashlight

High: 130 lumens; 1,230 candela; runs 1.75 hours

- . Low: 20 lumens, 230 candela; runs for 13 hours
- . 5.62" length, 2 oz weight

ProTac[®] 2L Flashlight

- · High: 350 lumens; 6,300 candela; runs 3.25 hours
- . Low: 30 lumens, 600 candela; runs for 35 hours

Part Number	Description	Length	Weight
SD888061	1L-1AA Flashlight	4.25"	4.8 oz
SD888033	2AA Flashlight	6.14"	3.4 oz
SD888039	2AAA Flashlight	5.62"	2 oz
SD888031	2L Flashlight	4.77"	2.8 oz

B. Streamlight JR.® LED Flashlight

- Up to 2,700 candela peak beam intensity, 225 lumens, 6 hour run time
- Option to use "AA" (L91) lithium batteries 10 hour run time
- Includes two "AA" alkaline batteries and nylon holster

Part Number	Description	Length	Weight	
SD871500	LED Flashlight	6.5"	4.1 oz	



C. Stylus Pro® and Stylus Pro Reach® Flashlights

Both models include a nylon holster and two AAA batteries. Stylus Pro®

- · Up to 950 candela peak beam intensity, 100 lumens, 8 hour run time
- 5.3" length, 1.64 oz weight, includes two "AAA" alkaline batteries

Stylus Pro Reach®

- . Features a flexible 8-inch cable to light your way
- . Up to 825 candela peak beam intensity, 38 lumens, 8 hour run time
- · Includes super-strong magnet that mounts light in virtually any position for hands-free use and two "AAA" alkaline batteries

Part Number	Description	Length	Weight	
SD866118	Stylus Pro [®] Flashlight	5.3"	1.64 oz	
SD866418	Stylus Pro Reach® Flashlight	7.5"/14.6"	2.7 oz	

D. Knucklehead® Flashlights

· Rechargeable or alkaline-powered work lights feature articulating head, magnet, hook and (2) C4(R) LEDs for close-up task work

Knucklehead® Flood SD890627 and SD890642

- High: 1,150 candela, 200 lumens, 3.5 hour run time
- . Low: 350 candela, 63 lumens, 16 hour run time

Knucklehead® HAZ-LO® Flood SD891627 and SD891642

- High: 730 candela, 163 lumens, 3.75 hour run time
- . Low: 230 candela, 50 lumens, 12 hour run time
- Class I & II, Division 1, Groups CDFG; Class I, Division 2,
- Groups A, B, C, D; Class III, T4 Charger meets requirements of NFPA 1901-14.1.11.2 (2016) mounted in any position

Part Number	Description	Length	Width
SD890627	Flood AC/DC	9.2"	23.1 oz
SD890642	Flood Alkaline	9.2"	18.3 oz
SD891627	HAZ-LO® AC/DC	9.2"	23.1 oz
SD891642	HAZ-LO® Alkaline	9.2"	18.3 oz

E. Waypoint[®] Flashlights

- · Pistol-gripped spot light with integrated stand for precise scene lighting
- · High: 625 m beam distance, 550 lumens, 10 hour run time
- . Low: 178 m beam distance, 40 lumens, 82 hour run time
- Unlimited runtime using 12V DC power cord (included)
- · Powered by 4 "C" size alkaline batteries (not included)



SD888061



Lockout/Tagout Products



A. Gate Valve Lockouts

Made of rugged injection-molded polypropylene

Part Number Description

BRD65560	1"-21/2" Gate Valve Lockout
BRD65561	21/2"-5" Gate Valve Lockout
BRD64057	1"-61/2" Adjustable Gate Valve Lockout

B. Ball Valve Lockouts

- . Two sizes fit most valves up to 3", locking them in the OFF position
- · BRD65669 is made of powder-coated steel
- · BRD65666 is made of super-tough nylon
- (service temp -40° to 248°F) 4-legged valve lockouts made from ultra-tuff polypropylene

Standard Ball Valve Lockouts

Part Number	Max Shackle Diameter	Valve Size/ Pipe Diameter	Handle Width	Max Handle Thickness
BRD65666	9/32"	1/4"-1"	11/2"	3/4"
BRD65669	9/32"	11/4"-3"	21/10"	11⁄4"

Ball Valve Lockout - Can also lock OPEN on pipes from 1/2" to 11/4" in diameter

Part Number Description

BRDBS07A Small Ball Valve Lockout for 1/2" to 21/2" Diameter Pipes

C. Butterfly Valve/Universal Valve Lockout

. For use on handle widths up to 1.6" (max handle thickness of 1.1")

Part Number Description

BRD51392 UVLO with 8' Sheathed Cable Attachment and Blocking Arm

D. Circuit Breaker Lockouts

 Extremely versatile – works on a wide range of single-pole, multi-pole and internal-trip breakers

Part Number Description

BRD65396	Breaker Lockout, Clamp On, 120/277 Volt
BRD65397	Breaker Lockout, Clamp On, 480/600 Volt
BRD66321	Multi-Pole Breaker Lockout
BRD65329	Oversized Breaker Lockout

E. 3-In-1 Electrical Plug Lockout

 Accommodates high and low-voltage plugs up to 3" diameter and 51/2" length


Part Number	Description
BRDPL023	3-In-1 Electrical Plug Lockout

F. Wall Switch Lockout

· Device may be used with most wall-mounted switches, locking switch in "on" or "off" position and is easily installed using existing screws

Part Number Description

BRD65392 Wall Switch Lockout

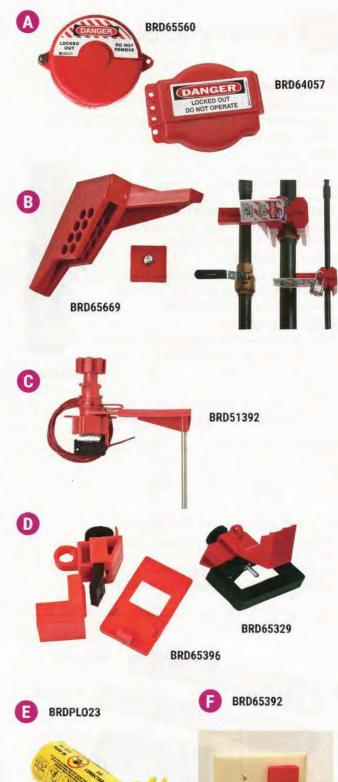



Facility Supplies

Lockout/Tagout Products



A. All Purpose Cable Lockout

· Effectively locks out multiple disconnects, valves or unusual energy-isolating devices

Part Number	Description	
BRD50943	APCLO with 8' Sheathed Metal Cable, 3/16" diameter, vinyl coating	

Note: Replacement cables available - call for more details

B. Steel Group Lockout Hasps

· Constructed of vinyl-coated high tensile steel with rust-resistant plating

Part	Number	Description
	and the second se	

BRD65375	1" Diameter Jaws	
BRD65376	11/2" Diameter Jaws	

C. Personal Padlock Pouch

- . Two Safety Padlocks (BRD99552) with two heavy-duty lockout tags (BRD65520) and nylon cable ties
- One lockout belt pouch (BRD51172), with two 1" hasps (BRD65375)

Part Number Description

O BRD105969 Pouch with 2 Keyed-Alike Padlocks

D. Electrical Lockout Tool Box

- · One extra-large lockout tool box (BRDLKP-TKLBOX) with components
- . Two safety padlocks with two heavy-duty lockout tags and nylon cable ties

Part Number Description

BRD99312 Electrical Lockout Tool Box

E. Personal Valve and Electrical Lockout Kit

- . Three keyed-alike safety padlocks with heavy-duty lockout tags (BRD65520) and nylon cable ties
- One medium lockout tool box (BRD105906) with components

Description Part Number

BRD105955 Personal Valve and Electrical Lockout Kit

F. 5-Lock Filled Board

- · Five safety padlocks (BRD99552) and 12 heavy-duty tags (BRD65520)
- One 1" metal hasp (BRD65375) and one 1¹/₂" metal hasp (BRD65376)

Part Number	Description
BRD51181	5-Lock Filled B

5-Lock Filled Board

WARNING O: This product can expose you to chemicals including Nickel (Metallic), which is known to the State of California to cause cancer, and Lead, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.









BRD51181





Lockout/Tagout Products



A. American Lock® Aluminum Safety Padlocks

- · Heavy-duty, 11/2" (38mm) wide anodized aluminum body
- 1/4" (6mm) diameter chrome plated, boron alloy shackle
- · Anodized finish suitable for lockout tagout in food processing facilities
- · Corrosion resistant finish for tough environments
- · High visibility color plus high security
- Master keyed 5-pin cylinder offers over 10,000 key changes

art Number Description		Color	
A60A1105BLK	1" Shackle	Black	
A60A1105BLU	1" Shackle	Blue	
A60A1105GRN	1" Shackle	Green	
A60A11050RJ	1" Shackle	Orange	
A60A1105RED	1" Shackle	Red	
A60A1105YLW	1" Shackle	Yellow	
A60A1107BLK	3" Shackle	Black	
A60A1107BLU	3" Shackle	Blue	
A60A1107GRN	3" Shackle	Green	
A60A11070RJ	3" Shackle	Orange	
A60A1107RED	3" Shackle	Red	
A60A1107YLW	3" Shackle	Yellow	







Zenex Padlocks - non-conductive, lightweight bodies with permanent write-on labels for worker identification. Key retaining feature ensures that padlocks are not left unlocked. Reserved-for-Safety, high security, 6-pin cylinder offers over 100,000 possible key changes.

B. Master Lock® Zenex Padlocks

- Designed specifically for lockout/tagout
- · Key retaining, which helps ensure that padlocks are not accidentally left unlocked
- 6-pin cylinder offers over 100,000 possible key changes
- · Permanent write-on labels eliminates the need for a separate tag
- 410 Model has a 11/2" wide x 13/4" tall body and 1/4" diameter shackle with 11/2" vertical clearance
- 411 Model has a 1¹/₂" wide x 3" tall body and ¹/₄" diameter shackle with 11/2" vertical clearance. Includes bilingual English/Spanish and English/French labels

Part Number	Description	Body Height	Color
M19410BLK	11/2" Shackle	13/4"	Black
M19410BLU	11/2" Shackle	13/4"	Blue
M19410GRN	11/2" Shackle	13/4"	Green
M194100RJ	11/2" Shackle	13/4"	Orange
M19410PRP	11/2" Shackle	13/4"	Purple
M19410RED	11/2" Shackle	13/4"	Red
M19410TEAL	11/2" Shackle	13/4"	Teal
M19410YLW	11/2" Shackle	13/4"	Yellow
M19411BLU	11/2" Shackle	3"	Blue
M19411GRN	11/2" Shackle	3"	Green
M19411RED	11/2" Shackle	3"	Red
M19411YLW	11/2" Shackle	3"	Yellow





Facility Supplies

INFORMATION FOR YOUR SAFETY




Fire Extinguishers

The most current issue of NFPA-10 should be consulted for minimum recommended fire extinguisher types, placement and travel distances. Contact your representative to help you evaluate and implement these recommendations.

CLASS A

Ordinary Combustibles: wood, paper, cloth, trash and other ordinary materials.

CLASS B



CLASS C Fire Involving Live

Electrical Equipment



CLASS D

Combustible Metals or Combustible Metal Alloys (No picture symbol)



A. ABC Dry Chemical Extinguishers

- Stored pressure ABC or Multi-Purpose extinguishers used for common combustibles, flammable liquids and live electrical equipment
- Dependable steel cylinders feature aluminum valves and include mounting brackets

Part Number	Description	Bracket	Ratings	Capacity
A61B417 A61B417T	Extinguisher Extinguisher	Wall Vehicle-Marine	1A:10B:C 1A:10B:C	2.5 lbs 2.5 lbs
A61B500 A61B500T	Extinguisher Extinguisher	Wall Vehicle-Marine	2A:10B:C 2A:10B:C	5 lbs 5 lbs
A61B456	Extinguisher	Wall	4A:80B:C	10 lbs
A61A411	Extinguisher	Wall	10A:120B:C	20 lbs

B. Halotron | Fire Extinguishers

- For use in computer rooms, telecommunications facilities, clean rooms, data storage areas, offices, boats and vehicles
- Stored pressure Halotron I is discharged as a rapidly evaporating liquid which leaves no residue
- Steel cylinders feature aluminum valves (Models 397 and 398 have a brass, chrome plated valve) and include mounting brackets
- EPA-approved Clean Agent HCFC for Class A, B and C hazards, it has a low GWP (Global Warming Potential), low ODP (Ozone Depletion Potential) and a low atmospheric lifetime

Part Number	Description	Bracket	Ratings	Capacity
A61A384T	Extinguisher	Vehicle	1B:C	1.4 lbs
A61B385TS	Extinguisher	Vehicle	2B:C	2.5 lbs
A61B386T	Extinguisher	Vehicle	5B:C	5 lbs
A61397	Extinguisher	Wall	1A:10B:C	11 lbs
A61398	Extinguisher	Wall	2A:10B:C	15.5 lbs



C. Carbon Dioxide Extinguishers

- CO₂ is a clean, non-contaminating, odorless gas discharged as a white cloud of snow - which smothers a fire by eliminating oxygen
- · Effective for flammable liquids and is electrically non-conductive
- · Rust free aluminum cylinders, metal valve construction and includes wall brackets
- Meets many hospital medical equipment requirements

Part Number	Description	Bracket	Ratings	Capacity
A61322	Extinguisher	Wall	5B:C	5 lbs
A61330	Extinguisher	Wall	10B:C	10 lbs
A61332	Extinguisher	Wall	10B:C	20 lbs

D. Water Mist Extinguishers

- · Best used for common combustible hazards where a potential electrical hazard exists
- Stored pressure water mist is discharged as a fine spray through a user friendly wand providing safety with no electrical conductivity back to the operator
- De-ionized water extinguishing agent leaves no powder residue; best for protection of hospital environments, valuable books and documents, telecommunications facilities and clean room manufacturing facilities (sold separately)
- Non-magnetic construction for use in MRI facilities · Antiseptic white painted stainless steel cylinders
- with all metal construction includes non-magnetic wall bracket

Part Number	Description	Bracket	Ratings	Capacity
A61B270NM	Extinguisher	Wall	2A:C	1.8 gals
A61B272NM	Extinguisher	Wall	2A:C	2.5 gals

E. Class D Extinguisher

- · Contains a special blended Sodium Chloride based dry powder extinguishing agent for use in combustible metal fires
- Extinguish fires involving magnesium, sodium, potassium and sodium-potassium alloys, there is also data showing that zirconium, uranium, titanium and powdered aluminum fires can be controlled and extinguished with this unique extinguisher
- Dependable drawn steel cylinders with all metal valve construction, feature an extension applicator to keep the operators hands away from the extreme heat

Description	Bracket	Capacity
Extinguisher Extinguisher	Wall Wall	30 lbs 30 lbs
	Extinguisher	Extinguisher Wall

* Contains a copper extinguishing agent specifically for lithium alloy fires



D

A61B272NM

Signs and Tags

 Unlimited colors and logos No minimum order requirements Photographic-quality digital printing · Lasts as long as it needs to last

We offer a comprehensive selection of materials to meet a variety of application and environmental requirements.

ACCUFORM

Justrite Safety Group

Accident Prevention, Safety Signs

Post safety signs to identify and indicate potential, type and degree of hazards that may lead to accidental injury or property damage

- Conveys a rapidly, easily understood message on how to avoid hazards
- Meets regulatory standards OSHA 29 CFR 1910.145 and ANSI Z535
- · Designed to meet general safety marking requirements
- Available in materials for use indoor or outdoor

Adhesive Vinyl (VS)

- Printed matte surface has permanent acrylic adhesive back
- · Flexible, can be applied to curved or uneven surfaces
- Moisture resistant for light-duty indoor and sheltered outdoor needs
- · Square corners and scaled back liner for quick peel-off and application

Plastic (VP)

- Sight flex ideal for indoor and sheltered outdoor needs
- Printed surface has clear UV protective overcoat
- · Rounded corners with 3/16" mounting holes

Aluminum (VA)

- · Has the strength of metal without the rust
- Printed surface has clear UV protective overcoat
- · Withstands splashes, wash-downs and outdoor conditions
- Abrasion and chemical resistant
- · Rounded corners with 3/16" mounting holes

How To Order Signs

Add A81 to the part number followed by the Material Code. For example:

- 1. Select Sign; MADM130
- 2. Add A81; A81MADM130
- 3. Select Material Code: Plastic VP
- Order Part Number; A81MADM130VP

Material	
Adhesive Vinyl	
Plastic	
Aluminum	
	Adhesive Vinyl Plastic

You Think It, We Build It

- Provide the message with or without attention header
- · Add logos, brands and images to the sign
- Unlimited colors or photographic images allowed
- Sign placement dictates material, size plus character height for distance readability

Contact your sales representative to have your sign created*, printed and shipped to you.

* Proof available upon request



DANGER

DO NOT ENTER

AUTHORIZED PERSONNEL ONLY

7" x 10" MADM140

10" x 14" MADM141

MCHL228 7" x 10" MCHL241 10" x 14" MCHL231 10" x 14" MCHL245

> (DANGER) OXYGEN

10" x 14" MCHL170

CAUTION

EAR AND EYE

PROTECTION

REQUIRED

7" x 10" MPPE436

10" x 14" MPPA608

NOTICE

MCHI 168

7" x 10"

7" x 10" MELC113 7" x 10" MSMK132 10" x 14" MELC114 10" x 14" MSMK133

7" x 10"

7" x 10"

10" x 14" MSTF661

7" x 10"

CAUTION DO NOT OPERATE WITHOUT GUARDS

(DANGER)

NO

SMOKING

(DANGER)

AUTHORIZED PERSONNEL

ONLY

10" x 14" MADM006

MADM130

7" x 10"

HIGH VOLTAGE

KEEP OUT

10" x 14" MELC128

7" x 10"

(DANGER)

DIESEL FUEL

10" x 14" MCHL226

(DANGER)

HARD HAT

AREA

7" x 10" MPPA004

10" x 14" MPPA005

(DANGER)

THIS MACHINE

STARTS AND STOPS

7" x 10" MEOM150

10" x 14" MEQM152

CAUTION

OPEN DOOR

SLOWLY

7" x 10" MABR603

10" x 14" MABR607

NOTICE

SAFETY GLASSES

REQUIRED IN THIS AREA

10" x 14" MPPA801

7" x 10"

MPPE854

7" x 10"

MCHL224

MELC127

7" x 10"

(DANGER)

DO NOT

ENTER

10" x 14" MADM139

(DANGER)

HIGH

VOLTAGE

WARNING

NO

TRESPASSING

7" x 10" MADM313

10" x 14" MADM304

CAUTION

WATCH FOR

FORKLIFT

TRAFFIC

7" x 10" MVHR631

10" x 14" MVHR633

FIRE

MEXG417 14" x 10" MFXG908

10" x 7"

MADM138

7" x 10" MEOC720 10" x 14" MEQC721

CAUTION WATCH

AUTHORIZED PERSONNEL YOUR STEP ONLY MSTE645

MADC800 7" x 10" 10" x 14" MADC801



10" x 14" **MEXT906**

MADC531

7" x 10" MEXT910 10" x 14" MEXT911







Custom Signs No set-up fees



360



SYSTEMS

Signs and Tags



Accident Prevention, Safety Tags

Safety tags are used to identify a temporary hazard until that hazard is eliminated or a hazardous operation is complete

- · Hang tag to alert and convey clear message for effective hazard identification
- · Prevents the potential for accidental injury and property damage
- · Header style tags meet the regulatory standards OSHA 29 CFR 1910.145(f), OSHA 29 CFR 1910.147, and ANSI Z535.5
- · General safety tags are common legends that apply to a variety of hazardous situations
- · Choose the material to meet the application and duration of the temporary hazard
- . 53/4" x 31/4" tags are available in packages of 25

PF-Cardstock (CTP)

- · Ideal for indoor use and short-term outdoor exposure
- Tear-resistant and waterproof
- · Scuff-resistant, matte surface is easy to write on
- Top edge has 3/8" plain, pull-resistant hole

RP-Plastic (PTP) 0

- Ideal for indoor and outdoor use
- Durable plastic with writable surface
- · Resists chemicals, tears, abrasions, dirt, and grease
- . Top 3/8" hole reinforced with brass grommet with 50 lb pull strength

HS-Laminate Plastic (LTP) 0

- Tear-proof, chemical resistant materials withstand harsh environments
- · Waterproof tags are ideal for extreme conditions
- · Matte surface is scratch resistant, yet easy to write on

How To Order Tags

Add prefix A81 to the part number followed by the Material Code. For example:

- 1. Select TAG; MDT246
- 2. Add A81; A81MDT246
- 3. Select Material Code; RP-Plastic-PTP
- 4. Order Part Number; A81MDT246PTP

Material	
PF-Cardstock	-
RP-Plastic	
HS-Laminate*	
	PF-Cardstock RP-Plastic

*Available where noted

WARNING O: This product can expose you to chemicals including Cadmium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



MGT208 Front/Back TRS307* Front/Back

TAB105 Front/Back

Custom Tags

- · No set-up fees
- Unlimited colors, brands and logos
- No minimum order requirements
- · Photographic-guality digital printing
- · Materials last as long as the temporary hazard

Get the Tag You Need:

- Message communicate short, direct action with or without attention header
- · Shape any configuration from traditional rectangle with top gabled-corners to octagon
- Size to fit the space or to be seen from a distance
- Design/Image add logos and photographic images in full color
- Material choose the best material for the application and duration, indoors or outdoors

Contact your sales representative to have your tag created*, printed and shipped to you.

* Proof available upon request





We also offer facility identification solutions from Brady® and NMC[™]. Call your representative for more information.



361



Facility Supplies

MAIL/FAX ORDER/RFQ FORM

All Safety Products, Inc. www.allsafetyproducts.com Sales Rep Code		Office Use Or Sales Order/RF	-		
P.O. Box 6353		p 0000		× ''	
Lakewood, CA 90714-6	353 Phone: 562.	630.3700	Date Order/RFC	Received	
Bill To:			Ship To:		
Company Name			Company Name		
Contact Name		Contact Name			
Address			Address		
City, State, Zip		City, State, Zip			
Contact Phone Number	Fax #		Contact Phone Num	ber Fax #	
E-Mail Address			E-Mail Address		
PO Number	Acct #	Required Date	Ship Method	Payment (CC,Check, PO?	
Quantity Part #	Cat. Pa	ge # Des	scription	Unit Price Amount	

Comments:				

	Office Use Only		
Credit Card#:	Subtotal:		
Type of Card (MasterCard/Visa/American Express – No Discover):			
Name on Card:	Sales Tax:		
Card Bill Address:			
Card Bill City, State, Zip:	Shipping:		
CVV Code (on back of card, usually 3 or 4 digits)			
Expiration Date:	Total:		
Buyer Approval:			

E-mail: sales@allsafetyproducts.com If filling out credit info, please don't e-mail. Okay to Fax Order to 562.630.3800